

SENATOR SERIES

STARTRANS

BUSES BY SUPREME





THE INCREDIBLY DURABLE STARTRANS SENATOR

The StarTrans Senator series meets your strictest driving demands. Strong fiberglass-reinforced panel (FRP) sidewalls eliminate exterior noise and are extremely strong and rugged to battle difficult road conditions. The interior surfaces feature stain- and scratch-resistant surfaces for added durability.



Optional interior seating

Beauty that's more than skin deep.

Smooth, aerodynamic styling, engineering excellence, and quality construction are why Supreme designs reign supreme.



Optional paratransit lift

Tough, solid value.

StarTrans Senators are encased in a steel cage for optimal safety. And every weld is individually inspected to make sure we adhere to our own high-quality standards and safety regulations.

StarTrans doesn't take a back seat when it comes to passenger comfort and convenience. Wide aisles and doors, plush upholstery, spacious luggage racks, and large, scenic windows are just some of the amenities.

Going that extra mile.

We offer a 12-month/12,000-mile warranty along with a five-year/75,000-mile warranty of the body structure. We also stand ready to meet your exacting requirements, including special design configurations. And we constantly look for new options to meet your needs and make your work easier.



Standard driver console area



*StarTrans Senator 22'
with optional rear
wheelchair doors*

SENATOR SERIES FEATURES

SUBFLOORING – 12-gauge steel outriggers, fully welded with floor-level Z rail, incorporated with chassis-rubber ride capabilities.

FLOORING – 3/4" marine-grade plywood with .024 aluminum underbelly, undercoated. Floor covered with 1/8" transit rubber. Aluminum heat shield over chassis, catalytic converter, and muffler.

SIDEWALLS – 3/4" polyurethane foam insulation (R-6, 12) gelcoated to 1/4" FRP exterior with 1/4" FRP interior. Reinforced with steel perimeter and transverse supports. Completely fiberglassed to adjoining body parts to form a single unitized body.

ROOFING – One-piece FRP/wood-core laminate roof with steel-cage reinforcement.

WINDOWS – 24" x 34" T-slider, 31% tinted. Clamp ring-style radius windows. Egress windows installed to meet FMVSS 217 requirements.

Operator's curbside windows AS-2 rated: upper and lower windows = 425 square inches visibility.

ENTRY – Spacious entry (32" x 83" clear opening) with doors that operate manually. The 14-gauge steel door frames are fully welded and powder-coated to enhance durability. The door panels are glazed and tempered glass. White step nosing and lighted stepwell standard. Entrance grab rail (left side).

LIGHTING – Each bus comes standard with six passenger courtesy lights.

ELECTRICAL – Wiring is color-coded with the number and function designated every 4" on the wire to enable identification and circuit traceability. Only premium components built to meet the Society of Automotive Engineers (S.A.E.) and Underwriters Laboratories (U.L.) requirements are used. Electronic control console switch panel.

Due to Supreme Corporation's commitment to product quality, specifications and options are subject to change in the interest of product improvement.



StarTrans Senator 22[®]

OPTIONAL A/C & HEAT – A/C systems ranging in size from 30,000 BTU to 88,000 BTU. Rear heat 40,000 BTU to 65,000 BTU.

OPTIONAL PARATRANSIT – Wheelchair accessibility with a wide range of securement systems and seating arrangements.

OPTIONAL LUGGAGE – Luggage can be stored in over-seat, floor-to-ceiling, rear compartments, or custom-designed areas.

OPTIONAL SEATING – Forward-facing, perimeter-style, and track seating are all available. Your choice of vinyl and cloth fabric in a wide range of colors.


- Bright white gelcoated body
- Black exterior mirrors – 7" x 10" with 6" x 3.5" convex mirror on each side
- Heavy-duty, 10-gauge wrap around bumper with anti-ride cover
- Mud flaps (front and rear)
- 12-month/12,000 mileage with five-year/75,000-mile warranty of body structure

CHEVROLET SPECIFICATIONS


- Chevrolet 12,300 GVW cutaway
- Tinted glass
- Automatic transmission
- 4:10 rear axle ratio
- Power steering
- Power brakes
- Dash A/C and heater
- Super engine cooling
- Tilt steering and cruise control
- 368-cubic-inch (Vortec 6000) 6.0L gas
- 35-gallon fuel capacity
- Radial tires LT225-16 D
- Chrome front bumper with license plate bracket
- Comfort-ride suspension – H.D. springs and shocks
- Read-out gauges
- Heavy-duty batteries
- 145 AMP alternator
- 139", 159", or 177" wheelbase

Dimensions


- Exterior width – 96"
- Exterior height – 114"
- First step to ground – 11" second-and third-step riser – 9" max.
- Step tread depth – 9" max.
- Entrance clear opening – 32" x 83" min.
- Interior width at seat level – 92 1/2"
- Interior width up 36" from floor – 93 3/8"
- Center aisle height – 80"
- Flat floor aisle height – 75"
- Double wheelchair doors – 46" x 70.5"
- Rear luggage compartment – 141 cubic feet (standard)

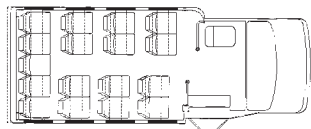


17 Passengers

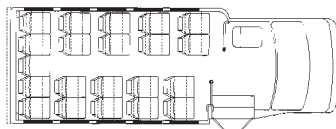


21 Passengers

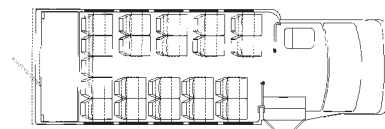


21 Passengers w/ luggage

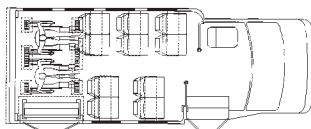

10 Passengers and 2 W/C

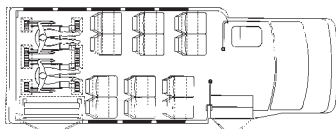

12 Passengers and 2 W/C

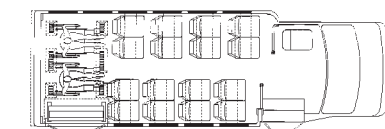

16 Passengers and 2 W/C



2592 Kercher Road • P.O. Box 463 • Goshen, IN 46528
574-642-4730 • 877-258-1391 • FAX 574-642-4108
www.StarTransBus.com